


Product Name	Commercial Induction Generators: Drop-in Pan Type	Quantity		Item#	
--------------	---	----------	--	-------	--



Standard Features

- Compact Design, Easy to Install
- Over 90% energy efficiency rate .
- Simple control: use the power control knob to switch on/off,
- Turn the power control knob to make step-less power regulation
- In case of error, LED lamp will blink error codes enabling user to diagnose and correct minor problems
- Internal cooling fan to keep internal electronics cool
- Automatic pan detection provides instant energy transmission to pan and automatic switch off when pan is not present.
- Automatic power adjustment when ambient temperature rises too high or in case of empty pan heating to prevent overheating
- Easy to clean high-impact glass-ceramic top surface
- Pan characterization feature measures pan almost instantly to allow unit to supply optimal power to each pan at every setting
- Minimum functional pan diameter is 120mm.
- Germany TUV-Rheinland CE approved
- Conforms to UL197/ CSA STD. C22.2 NO.109
- Conforms to NSF STD.4
- Conforms to FCC Part 18

<p>Qingdao Middleby Induction Co., Ltd. 9 Xinghai Road, Huanhai Economical Development Zone, Chengyang District, Qingdao 266108, P.R. China</p>	<p>Phone: +86532-8667-2001 Fax : +86532-8667-2003</p>
--	---

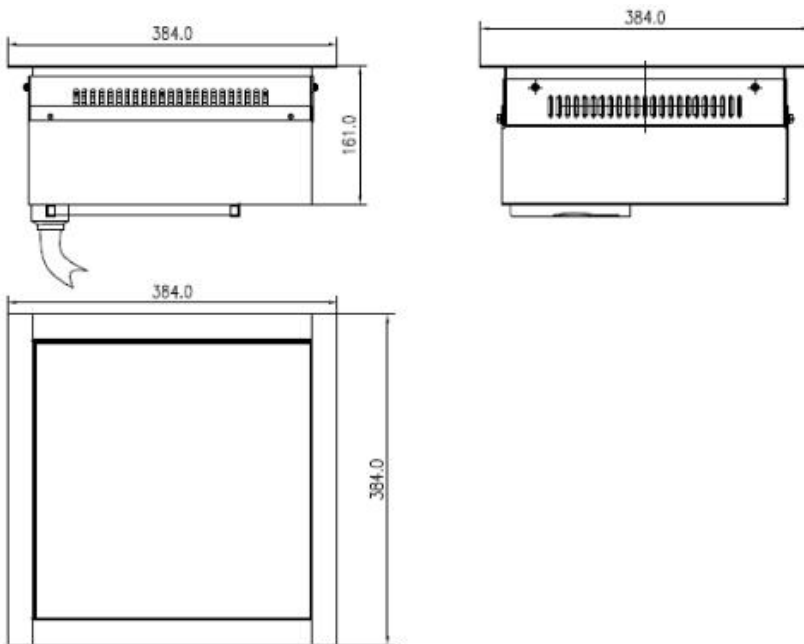

Specifications

Model Number	IND-30P-3500
Power Requirements	220V-240V AC, 50/60Hz
Power Consumption	3,500W(MAX)
BTU Comparison	31,000BTU
Amperage	16A(MAX)
Ceran Glass	320*320 SCHOTT Ceran Glass
Dimensions(mm)	384*384*161
Installation Hole(mm)	360*360
Weight(kg)	10
Packaged Dimensions(mm)	550*550*290
Packaged Weight(kg)	12
Power Cord Length(mm)	1800
Plug Type	EU plug
Warranty	1 year

Qingdao Middleby Induction Co., Ltd.

9 Xinghai Road, Huanhai Economical Development Zone,
Chengyang District, Qingdao 266108, P.R. China

Phone: +86532-8667-2001

Fax : +86532-8667-2003